



Colour switchable between
2700k, 3000k, & 4000k



Energy efficient up to
138lm/W



Available with DALI-2, 1-10V
& PUSH-DIM

NOVA CSP

Designer light that can be suspended, surface or wall mounted

FEATURES

IP rating	IP40
IK rating	IK06
CSP Switchable	Switchable CCT
UGR	UGR<19
Sensor Option	On Request
Dimmable Option	Yes (DALI-2, 1-10V, PUSH-DIM)
LED Lifetime	L70 50,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM5
Emergency Option	Yes, remotely using Salvus Route

INSTALLATION INFORMATION

Input	220-240V AC
Maximum Ambient Temperature	-20°C - 50°C
Weight	3.8kg
Inrush Current	4.9A 154ms
Construction Material	Aluminium housing, Microprism lens
Electric Class (1, 2, 3)	II
Install Connector Type	Push-fit terminals 0.5 - 1.5mm²
UK Building Regulations	Part P & L
Mounting Options	Ceiling & suspended
Power Factor	0.95

Photometrics @ 25°C

Product Code	Finish	Type	Beam	W	Colour	lm	lm/W	Energy
NVB45DS	Black - gold	450mm	120°	26W	2700K	2600	100	
					3000K	2800	108	
					4000K	3000	115	
NVB60DS	Black - gold	600mm	120°	40W	2700K	4200	117	
					3000K	4500	125	
					4000K	4800	133	
NVB90DS	Black - gold	900mm	120°	68W	2700K	7900	122	
					3000K	8300	128	
					4000K	9000	138	
NVW45DS	White - gold	450mm	120°	26W	2700K	2600	108	
					3000K	2800	117	
					4000K	3000	125	
NVW60DS	White - gold	600mm	120°	40W	2700K	4200	117	
					3000K	4500	125	
					4000K	4800	133	
NVW90DS	White - gold	900mm	120°	68W	2700K	7900	122	
					3000K	8300	128	
					4000K	9000	138	

Energy rating is a reflection of the LED light source.

WIRING INFORMATION

Cable / Flying Lead	0.75-1.5mm²
Type of Wiring Required	Parallel


ACCESSORIES

NV45UPM	Nova Uplight Kit, 450mm, 13W 1100lm, On-Off, 3000K	Sold Separately
NV60UPM	Nova Uplight Kit, 600mm, 20W 1700lm, On-Off, 3000K	Sold Separately

FEATURES & BENEFITS

- Wide light emitting surface designed for superior optical control and comfortable light
- Makes rooms appear larger and wider
- Floating impression when surface-mounted
- Design-led pendant can be centrepiece of any room
- Wall mounted creates interest
- 450mm and 600mm can be wall mounted
- 4000K for focus scenes - 3000K for social scenes - 2700K for relaxation

BEAM ANGLE: 120°

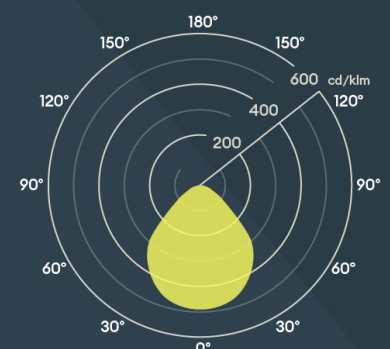

NV90UPM	Nova Uplight Kit, 900mm, 28W 2400lm, On-Off, 3000K	Sold Separately
NVBSUS2M	Nova Pendant Kit Black, 2 metres, 5 core cable	Sold Separately
NVWSUS2M	Nova Pendant Kit White, 2 metres, 5 core cable	Sold Separately
EMRBST	Salvus Route Black, Self Test, Open Corridor Lens	Sold Separately
EMRWST	Salvus Route White, Self Test, Open Corridor Lens	Sold Separately



COLLINGWOOD
LIGHTING

LIGHTING INNOVATION

Designer light that can be surface mounted to create a floating effect, suspended to be a centrepiece of a room or wall mounted to create interest. Colour switchable as standard, Nova as be a cool 4000K white, neutral 3000K or warm and inviting 2700K.