


SPECIFICATIONS


LED Chip	Cree XHP-50-2 field replaceable LED board
Luminaire Output*	85 lumens @ 350mA (2W)
Lumens Per Watt*	42.5 lumens @ 2W minimum
LED Life Expectancy	50,000 hours L70
CRI (3000K)	90+
Ingress Protection	IP66
Warranty	Electronics = 5 years (Excludes third party lamps and power supplies) Aluminium = 5 years



Surface Mount

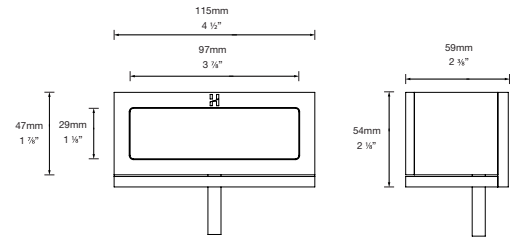

Spike Mount

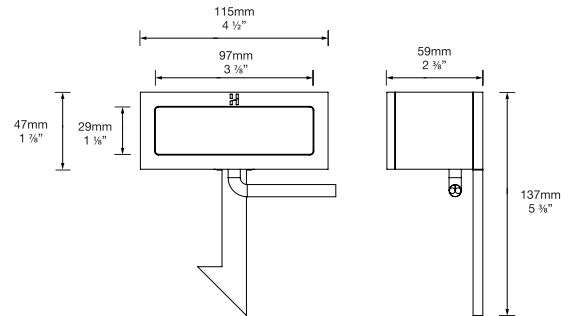

PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

Product Order Code: VRGSM/L

Luminaire

☒ VRGSM/L ☐ VRGSPK/L

Power

Material/Finish

Colour

S Constant Current Input, Parallel Wired, 2W & 4W

Requires Constant Current Driver (not supplied).
Fixture Input: 6Vf, 2W (350mA) & 4W (700mA).

D3 12VAC Input, Parallel Wired, 2W & 4W

Requires Magnetic/Wire Wound 12VAC Transformer (not supplied).
Fixture Input: 12VAC, 2W (350mA) & 4W (700mA).

D24 24VDC Input, Parallel Wired, 2W & 4W

Requires 24VDC Constant Voltage Power Supply (not supplied).
Fixture Input: 24VDC, 2W (350mA) & 4W (700mA).

Aluminium Powder Coat Colours

EBK	Black
EBZ	Bronze
EOGR	Olive green
EWB	White
EDG	White Birch
EDG	Dark Grey
ESTAR	Silver Star
ECT	Corten
FS	Fine Silver

22	2200K
27	2700K
3	3000K
4	4000K

Address

130 Felton Mathew Ave
Saint Johns, Auckland 1072
New Zealand

Contact

Ph: +64 9 528 9471
E: info@hunza.co.nz
Web: hunzalighting.com

LUMINAIRE INFORMATION

CNC machined from the following materials

Powder Coated Aluminium

Virgin, high corrosion resistant, low copper content (0.001%) aluminium with chromate substrate, and a highly UV-resistant polyester powder coat.

Gaskets

Silicone, iron impregnated 220°C (428°F).

Lens

10mm (3/8") extra clear, low iron, shatter resistant glass. Lifetime warranty.

Mounting

Surface Mount - Drill two 70mm (2 ¾") 14mm (1/2") mounting holes, remove the screws, mount the base plate, and reattach the screws.
Spike - Spike is inserted directly into the earth.

Luminaire Weight


Surface Mount	0.550kg (1lb 3oz)
Spike Mount	0.650kg (1lb 7oz)

WIRING GUIDE

Diagrams are a guide only, wire colours and polarity may change depending on fixture and country.


Circuit: Constant Current

Please see installation instructions for full details.

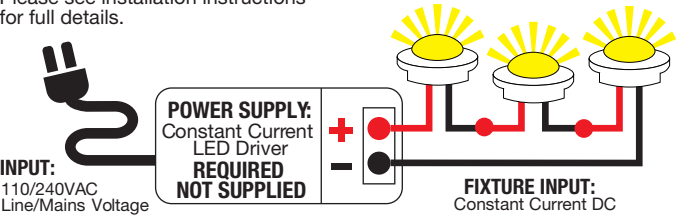

Circuit: 24VDC - Wired in Parallel

Please see installation instructions for full details.

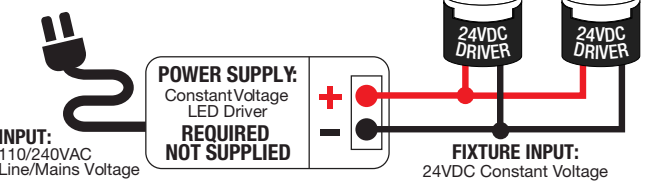

Circuit: 12VAC - Wire in Parallel

Please see installation instructions for full details.

