HUNZA
PURE OUTDOOR LIGHTING

Arch Bollard Round

PureLED

Project _____

Type _____

Source _____


Notes _____


SPECIFICATIONS

LED Chip	Cree CXB 1830 field replaceable LED board
Luminaire Output*	3000 lumens @ 700mA (26W)
Lumens Per Watt*	115 lumens @ 26W minimum
LED Life Expectancy	50,000 hours L70
CRI (3000K)	90+
Ingress Protection	IP66
Warranty	Electronics = 5 years (Excludes third party lamps and power supplies) Aluminium = 5 years
Standards	CE IEC/BS/AS/NZ 60598 UL 1598 UL 2108 UL 1838

*Delivered from the luminaire with an unobstructed beam



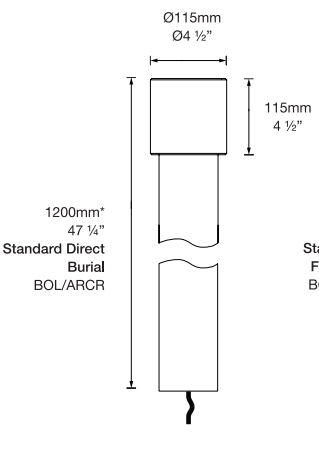

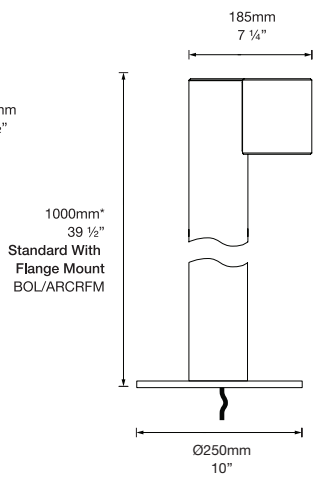

Custom pole height avaliable, 150mm (6") minimum, 2000mm (79") maximum

PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

Product Order Code: BOL/ARCR

Luminaire

☑ BOL/ARCR ☐ BOL/ARCRFM

Power	Material/Finish	Beam	Colour	Accessories	
☐	☐	☐	☐	☐	☐ ☐

Power

- **SR** Constant Current Input, Series Wired, 26W
  Requires Constant Current Driver (supplied separately).
  Fixture Input: 37Vf @700mA maximum.
- **S** Constant Current Input, Series Wired, 26W
  Requires Constant Current Driver (not supplied).
  Fixture Input: 37Vf @700mA maximum.
- **D24** 24VDC Input, Parallel Wired, 26W
  Requires 24VDC Constant Voltage Power Supply (not supplied).
  Fixture Input: 24VDC, 26W (700mA).
- **R** 90-264VAC Input, Parallel Wired, 26W
  Integral Constant Current Driver (supplied and installed).
  Fixture Input: 90 - 264VAC (26W, 700mA).

Material/Finish

Aluminium Powder Coat Colours

- **EBK** Black
- **EBZ** Bronze
- **EOGR** Olive green
- **EWH** White
- **EWB** White Birch
- **EDG** Dark Grey
- **ESTAR** Silver Star
- **ECT** Corten
- **FS** Fine Silver

Beam

- **TYP2** Type 2
- **TYP4** Type 4
- **95** 95 Degrees

Colour

- **2** 2700K
- **3** 3000K
- **4** 4000K

Accessories

- **MOUNT CAGE** Mounting Cage
  Only avaliable for Flange Mount

HUNZA
PURE OUTDOOR LIGHTING

Address
130 Felton Mathew Ave
Saint Johns, Auckland 1072
New Zealand

Contact
Ph: +64 9 528 9471
E: info@hunza.co.nz
Web: hunzalighting.com

This document contains proprietary information of Hunza™. Its receipt or possession does not convey any rights to reproduce or disclose its content. Due to continued product improvements, specifications may change without notification.

Installation, IES & Guides are available online

MADE IN NEW ZEALAND

LUMINAIRE INFORMATION

CNC machined from the following materials

Powder Coated Aluminium
Virgin, high corrosion resistant, low copper content (0.001%) aluminium with chromate substrate, and a highly UV-resistant polyester powder coat.


Gaskets
Silicone, iron impregnated 220°C (428°F).

Lens
Extra clear optical silicone TIR.

Mounting
Pole is set directly into concrete or earth. For flange mounting please refer to the Hunza website for mounting instructions.

Luminaire Weight
6kg (13lbs 4oz) without flange mount


ACCESSORIES



Mounting Cage


BEAM ANGLES


Extra clear optical silicone TIR.







TYPE 2





TYPE 4






95°


WIRING GUIDE

Diagrams are a guide only, wire colours and polarity may change depending on fixture and country.


Circuit: Contant Current - Wired in Series
Please see installation instructions for full details.

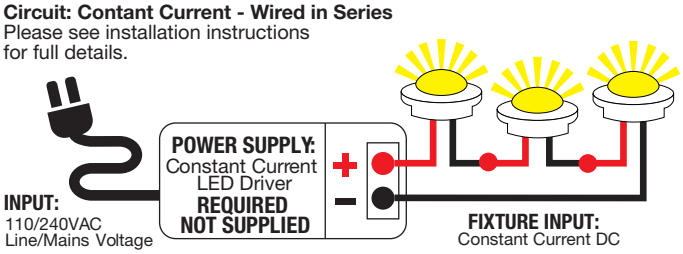

Circuit: 90 - 264VAC - Wired in Parallel
Please see installation instructions for full details.

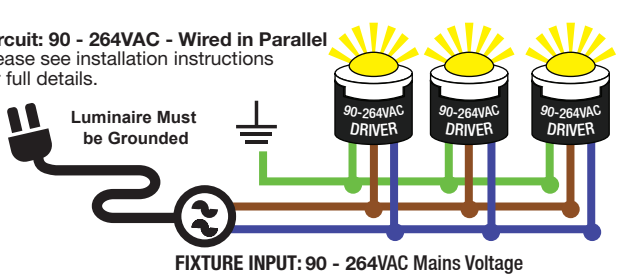

Circuit: 24VDC - Wired in Parallel
Please see installation instructions for full details.

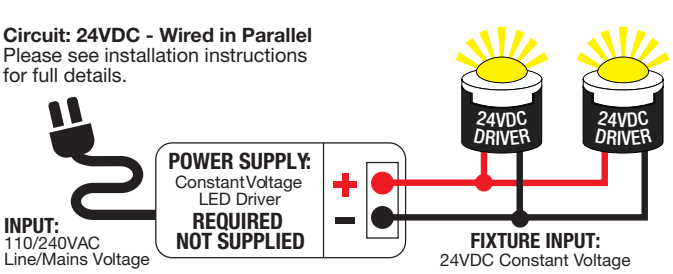

HUNZA
PURE OUTDOOR LIGHTING

Address
130 Felton Mathew Ave
Saint Johns, Auckland 1072
New Zealand

Contact
Ph: +64 9 528 9471
E: info@hunza.co.nz
Web: hunzalighting.com

This document contains proprietary information of Hunza™. Its receipt or possession does not convey any rights to reproduce or disclose its content. Due to continued product improvements, specifications may change without notification.

Installation, IES & Guides are available online

MADE IN NEW ZEALAND