HUNZA
PURE OUTDOOR LIGHTING

Brick Light Surface Mount

PureLED

Project _____

Type _____

Source _____


Notes _____

SPECIFICATIONS

LED Chip	x4 Cree XHP-50 Plug and Play field replaceable LED board
Luminaire Output*	260 lumens @ 350mA (8.4W)
Lumens Per Watt*	31 lumens @ 8.4W minimum
LED Life Expectancy	50,000 hours L70
CRI (3000K)	90+
Ingress Protection	IP66
Warranty	Electronics = 5 years (Excludes third party lamps and power supplies) Aluminium = 5 years Solid Bronze = 10 years Stainless Steel = 10 years

*Delivered from the luminaire with an unobstructed beam



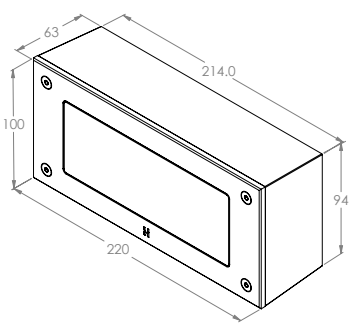

PRODUCT CONFIGURATION

Product Order Code: BRKSM/L

Please fill in appropriate codes into boxes provided

Luminaire

☑ BRKSM/L

Power | **Material/Finish** | **Colour** | **Accessories**

Power

S	Constant Current Input, Series Wired, 8.4W Requires Constant Current Driver (not supplied). Fixture Input: 24Vf @ 350mA maximum.
D24	24VDC Input, Parallel Wired, 8.4W Requires 24VDC Constant Voltage Power Supply (not supplied). Fixture Input: 24VDC, 8.4W (350mA).

Material/Finish

Aluminium Powder Coat Colour Options

EBK	Black
EBZ	Bronze
EOGR	Olive green
EWH	White
EWB	White Birch
EDG	Dark Grey
ESTAR	Silver Star
ECT	Corten
FS	Fine Silver

Other Options

SBZ	Solid Bronze
SS	316 Stainless Steel

Colour

22	2200K
27	2700K
3	3000K
4	4000K

Accessories

CJK	Cable Joint Kit
BRK LENSF	Frosted Lens

HUNZA
PURE OUTDOOR LIGHTING

Address
130 Felton Mathew Ave
Saint Johns, Auckland 1072
New Zealand

Contact
Ph: +64 9 528 9471
E: info@hunza.co.nz
Web: hunzalighting.com

This document contains proprietary information of Hunza™. Its receipt or possession does not convey any rights to reproduce or disclose its content. Due to continued product improvements, specifications may change without notification.

Installation, IES & Guides are available online

MADE IN NEW ZEALAND

LUMINAIRE INFORMATION

CNC machined from the following materials

Powder Coated Aluminium

Virgin, high corrosion resistant, low copper content (0.001%) aluminium with chromate substrate, and a highly UV-resistant polyester powder coat.

Solid Bronze

High quality LG2 bronze with modified lead range, high corrosion resistance and not subject to dezincification. Due to the nature of bronzE, it patinas over time. This patina acts as a protective layer that prevents further corrosion and enhances the metal's resistance to the elements

316 Stainless Steel

Stainless Steel with high corrosion resistance and superior resistance against rust and abrasion.

Further Information

Gaskets

Silicone, iron impregnated 220ºC (428ºF).


Mounting


Designed to be mounted in a 176mm (7") x 80mm (3 1/8") recess and fixed in place with four stainless steel screws

Step Lens

10mm (3/4") extra clear, low iron,shatter resistant glass. Lifetime warranty.

BEAM ANGLE






WIRING GUIDE


Available for download: hunzalighting.com/downloads

Diagrams are a guide only, wire colours and polarity may change depending on fixture and country.

Circuit: Contant Current - Wired in Series
Please see installation instructions for full details.

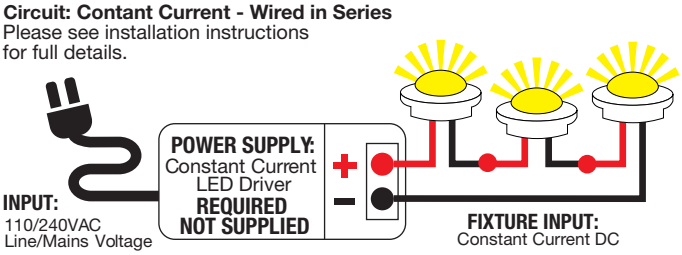

Circuit: 24VDC - Wired in Parallel
Please see installation instructions for full details.

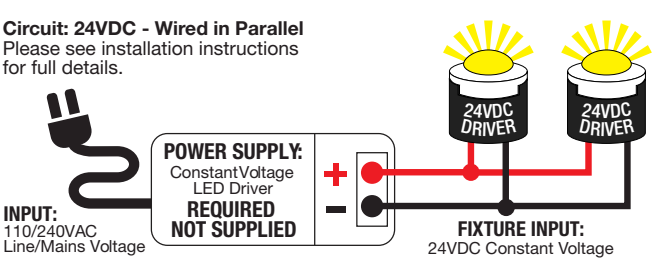

HUNZA
PURE OUTDOOR LIGHTING

Address
130 Felton Mathew Ave
Saint Johns, Auckland 1072
New Zealand

Contact
Ph: +64 9 528 9471
E: info@hunza.co.nz
Web: hunzalighting.com

This document contains proprietary information of Hunza™. Its receipt or possession does not convey any rights to reproduce or disclose its content. Due to continued product improvements, specifications may change without notification.

Installation, IES & Guides are available online

MADE IN NEW ZEALAND