


## Mouse Light Square with PURE LED

PROJECT:
TYPE:
SOURCE:
NOTES:

### SPECIFICATIONS



LED Chip	Cree XPG-3 Plug and Play field replaceable LED board
Luminaire Output*	40 Lumens @ 700mA (2W) 20 Lumens @ 350mA (1W)
Lumens Per Watt*	20 lm/W
LED Life Expectancy	50,000 hours L70
CRI (3000K)	90+
Colour Temperatures	2700K, 3000K, 4000K
Beam Angles	120
Ingress Protection	IP66
Warranty	Electronics = 5 years Stainless Steel Body = 10 years Solid Bronze Body = 25 years
Standards	AS/NZS 61046, EN60598 cUL 1838, 2108 CSA C22.2 No.250.7, No.250.0-08 CE

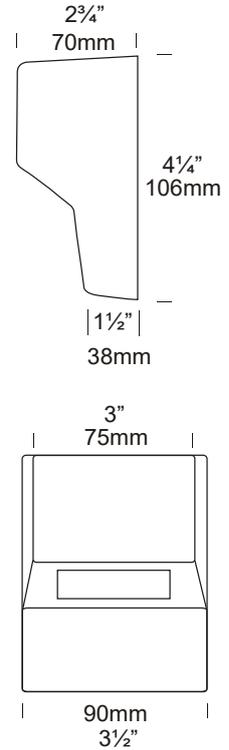

\*Delivered from the Luminaire with unobstructed beam

### PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

Cat. No. MOUSESQ/L

Luminaire	Power	Material/Finish	Beam	Colour	Accessories
MOUSESQ/L					
S	700mA Input, Series Wired 2W	SBZ Solid Bronze	120 120°	2 2700K	CJK Cable Joint Kit
D3	12VAC, 350mA Parallel Wired 1W	SS Stainless Steel		3 3000K	
D7	12VAC, 700mA Parallel Wired 2W			4 4000K	
R	240V Input, Retro, Parallel Wired				

<p><b>S - Series Remote Driver</b> Power Supply: Constant current driver REQUIRED - NOT SUPPLIED Fixture Input: Individual fixtures require 3 Vf @ 700mA maximum</p>
<p><b>D3 D7 - 12VAC Input</b> Power Supply: Line/Mains to 12VAC Transformer REQUIRED - NOT SUPPLIED Fixture Input: 12VAC, 3watt total (driver include) Fixture Output: D3 = 3Vf @ 350mA 1W D7 = 3Vf @ 700mA 2W</p>
<p><b>R - 240VAC Retro Driver</b> Fixture Input: 240vac, 3 watt total (driver included) Fixture Output: 3vdc, 700mA Not UL approved. Not available in USA.</p>

Additional Comments:

\*Due to continued product enhancements, specifications may change without notification.

# LUMINAIRE CONSTRUCTION

**CNC machined from one of the following metals:**

**Solid Bronze:**

Investment cast in solid bronze with forge mounting plate.

**316 Stainless Steel:**

Investment cast in 316 stainless steel with investment cast 316 stainless steel mounting plate.

**Lens:**

2mm (1/16") frosted tempered shatter resistant glass.

Lifetime Warranty.

**Cable**

Water resistant rubber SWOOJ cable with HUNZA™ Anti-Syphon™ barrier system

**Mounting:**

Mount using a mounting plate fixed to the wall with 316 stainless screws. The luminaire is then fitted to the back plate using two pan head screws.

**Luminaire Weight:**


SBZ: 0.820kg (1lb 13oz)

SS: 0.750kg (1lb 10oz)



## BEAM ANGLES

IES files available for download: [hunzaliveighting.com/downloads](http://hunzaliveighting.com/downloads)




120°

## WIRING GUIDE


Available for download: [hunzaliveighting.com/downloads](http://hunzaliveighting.com/downloads)

**NOTE:** Diagrams are a guide only, wire colours and polarity may change depending on fixture and country.


**Series/Remote Driver**

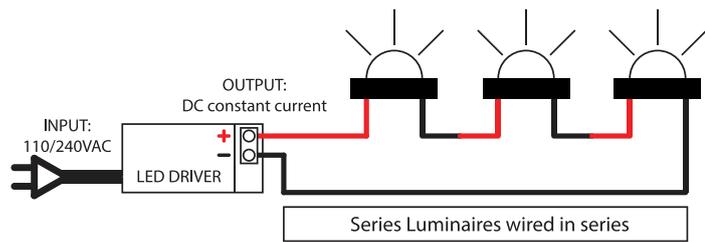

**12VAC Integral Driver**

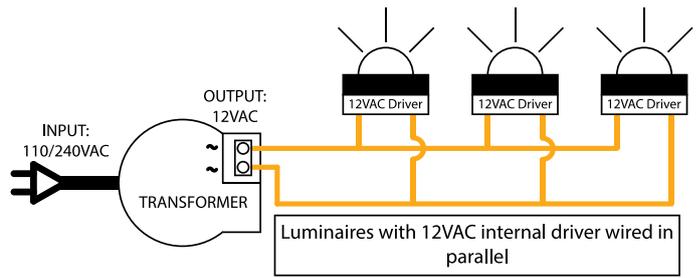

**110/240V Integral Driver**

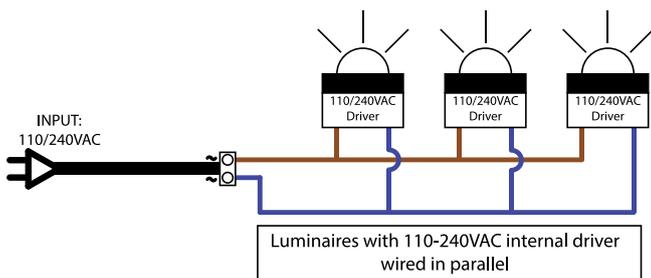

\*Due to continued product enhancements, specifications may change without notification.



**HUNZA LIGHTING**  
130 Felton Mathew Ave  
Saint Johns  
Auckland 1072  
New Zealand

Ph: +64-9-528 9471  
Fax: +64-9-528 9471  
hunza@hunza.co.nz  
www.hunzaliveighting.com

**INTERNATIONAL CONTACTS:**  
[www.hunzaliveighting.com/contact](http://www.hunzaliveighting.com/contact)

This document contains proprietary information of Hunza™. Its receipt or possession does not convey any rights to reproduce or disclose its content.