


PROJECT:
TYPE:
SOURCE:
NOTES:

PURELED SPECIFICATIONS


LED Chip	Cree XHP-50-2 Plug and Play field replaceable LED board
Luminaire Output	600 Lumens @ 1050mA (6 watts), 420 Lumens @ 700mA (4 watts), 240 Lumens @ 350mA (2 watts), delivered from luminaire with unobstructed beam.
Lumens Per Watt	100 Lumens @ 6 watts minimum, delivered from luminaire with unobstructed beam
CRI (3000K)	85+ Standard, 90+ Optional
Colour Temperatures	2700K, 3000K, 4000K
Beam Angles	15, 25, 38, 60
Ingress Protection	IP68 <i>*not for use in pool or ponds</i>
Warranty	Electronics = 5 years Flange SBZ/SS = 10 years Body Aluminium = 5 years
Standards	AS/NZS 61046 cUL 1838, 2108 CSA 22.2 No. 250.7, No. 250.0-08, CE

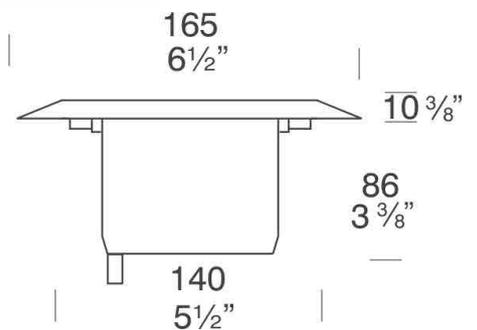

PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

Cat. No. LLDMMV/L

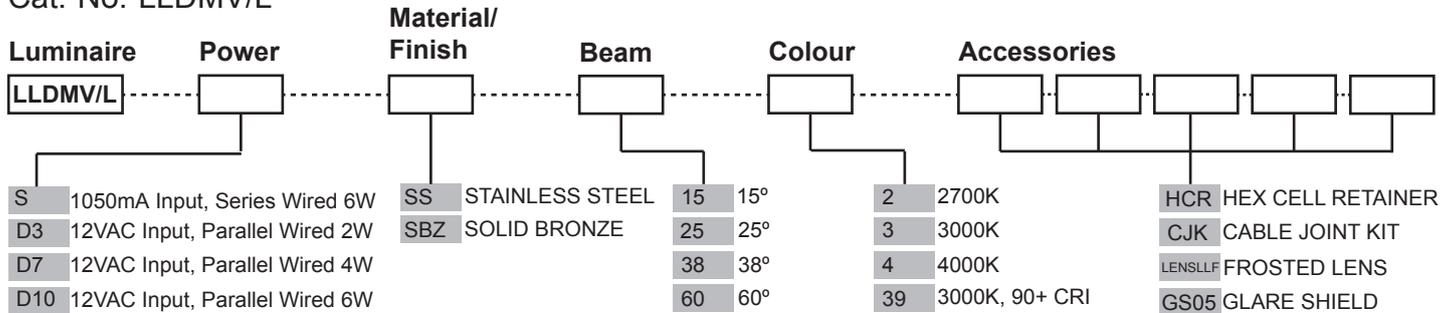

SERIES, REMOTE DRIVER REQUIRED:

Constant current driver
Individual fixtures require 6vdc @ 1050mA maximum

12VAC INTEGRAL DRIVER:

Hunza integrated plug and play driver (included)
Input: 9-15VAC.
Output: 6vdc @ D3=350mA, D7=700mA, D10=1050mA (1050mA limited to ≤ 40°C (104°F) ambient temperature in stainless steel)

OTHER LAMP OPTIONS:

LLDMV/H - MR16 Halogen 12V Lamp
LLDMV/SL - MR16 LED Retrofit 12V Lamp (lamps vary by market - please refer to supplier for details)
LLDMV/GUH - GU10 120/240V Halogen Lamp
LLDMV/GUSL - GU10 LED Retrofit 120/240V Lamp (lamps vary by market - please refer to supplier for details)

[Click here for halogen specification sheet](#)

[Click here for 240v Remote Power Supply Guidance Charts](#)

[Click here for USA Remote Power Supply Guidance Charts](#)

LUMINAIRE CONSTRUCTION

CNC machined from one of the following metals:

Aluminium:
 Body: cast from high corrosion resistant CC401 low copper aluminium alloy, with chromate substrate and high UV resistant polyester double powder coated.
 Colour: Black

Solid Bronze:
 Flange: solid bronze bar 165mm (6½")

316 Stainless Steel:
 Flange: 316 stainless steel 165mm (6½") rod.

Flange:
 The flange is attached to the body by three 316 stainless steel allen head anti vandal screws.

Lens:
 12mm (1/2") extra clear, low iron, flush fit, shatter resistant glass.
 Lifetime warranty


Gaskets:
 Silicone 220°C (428°F)

Adjustability:
 The gimbal is fully adjustable, allowing 360° rotation and 0-20° elevation.


Mounting:
 Deck Mount version for mounting through a 145mm (5½") hole in a wooden or concrete deck.
 Lawn Lite Deck Mount version is not suitable for driving over.

Luminaire Weight:
 Low voltage
 SBZ: 1.220kg (2lb 11oz)
 SS: 1.510kg (3lb 5oz)

ACCESSORIES



Hex Cell Retainer




Glare Shield


BEAM ANGLES

High efficiency PMMA TIR lenses. Field replaceable


IES files available for download: hunzalighting.com/downloads




15° FWHM TIR



25° FWHM TIR




38° FWHM TIR

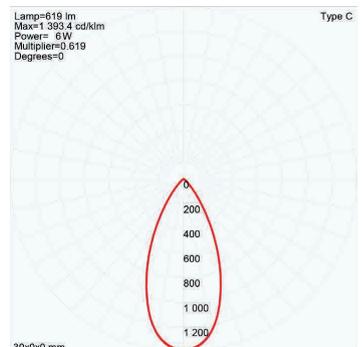

60° FWHM TIR

WIRING GUIDE

Series/remote driver

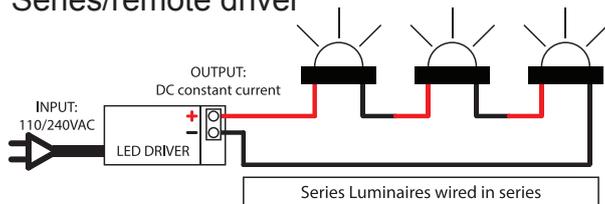

Diagrams are a guide only, wire colours and polarity may change depending on fixture and country

Available for download: hunzalighting.com/downloads

12v integral driver

