

Ultra 35 Wall Spot Light with PURE LED

PROJECT:
TYPE:
SOURCE:
NOTES:

SPECIFICATIONS



LED Chip	Cree CXA 1830 field replaceable LED board
Luminaire Output*	2700 Lumens minimum @ 700mA (26 Watts)
Lumens Per Watt*	100 Lumens minimum @ 26 Watts
LED Life Expectancy	50,000 hours L70
CRI (3000K)	80 Standard, 90+ Optional
Colour Temperatures	2700K, 3000K, 4000K, 3000K (90+CRI)
Beam Angles	13, 20, 25, 34
Inverse Kinematics Rating	IK10
Ingress Protection	IP66
Warranty	Electronics = 5 years Aluminium Body = 5 years
Standards	BS/EN 60598.2.2 cUL 1598, CSA C22.2 No. 250.0 CE
B Number	94.05



*Delivered from the Luminaire with unobstructed beam

PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

Cat. No. WS/U35

Luminaire	Power	Material/Finish	Beam	Colour	Accessories					
WS/U35										
SR	700mA Input, Series Wired 26W	ALUMINIUM	13	2	CJK Cable Joint Kit HCL/U35 Hex Cell Louvre ULT35GG Glare Guard ULT35SNT Snoot Mounting Options PB/U35 Pole Bracket ULT35WP Wall Plate					
R	Retro, 120-277VAC Input, Parallel Wired		13°	2700K						
D24	24VDC Input, Parallel Wired		20	3000K						
SR Series Remote Driver (Included, NOT Installed) Constant current driver. Individual fixtures require 37VDC @ 700mA maximum (non-dimming). *0-10 Volt dimming option available	R Retro™ 110/240VAC Driver: Constant current driver (included) Input: 120, 240, 277 Volts Output: 30 Watts total, 37VDC @ 700mA constant current (non dimming) *0-10 Volt dimming option available		EBC BLACK EBZ BRONZE EOGR OLIVE GREEN EWH WHITE EWB WHITE BIRCH EDG DARK GREY ESTAR SILVER STAR ECT CORTEN	25		4				
				25°		4000K				
				34		39				
				34°		3000K 90+ CRI				
				Additional Comments:						

*Due to continued product enhancements, specifications may change without notification.

LUMINAIRE CONSTRUCTION

CNC machined from one of the following metals:

Aluminium:

Base: 101mm (4") solid aluminium rod
 Body: 101mm (4") high corrosion resistant aluminium rod with chromate substrate and high UV resistant polyester powder coat.

Colours: Black, Bronze, Silver Star, White, White Birch, Olive Green, Dark Grey, Corten.

316 Stainless Steel:

Bracket: laser cut and folded 316 stainless steel.

Adjustability:

The fully adjustable head allows 360 degree rotation and 0-120 degree elevation.

Cable:

Water resistant rubber SWOOJ cable with HUNZA™ Anti-Syphon™ barrier system.

Gaskets:

Silicone, iron impregnated 220°C (428°F).

Step Lens:

12mm (1/2") extra clear, low iron, shatter resistant glass. Lifetime warranty.

Mounting:

The mounting bracket is fixed to the surface using three stainless steel screws.

Pole Bracket - mount to pre-installed poles.


Wall Plate - mount over junction boxes.

Luminaire Weight:

4kg (9lb)




ACCESSORIES

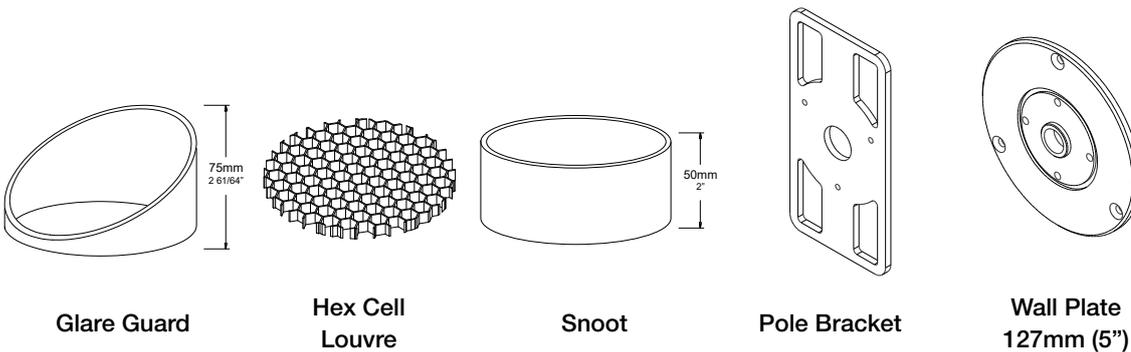

BEAM ANGLES

High efficiency Reflectors. Field replaceable


IES files available for download: hunzalighting.com/downloads

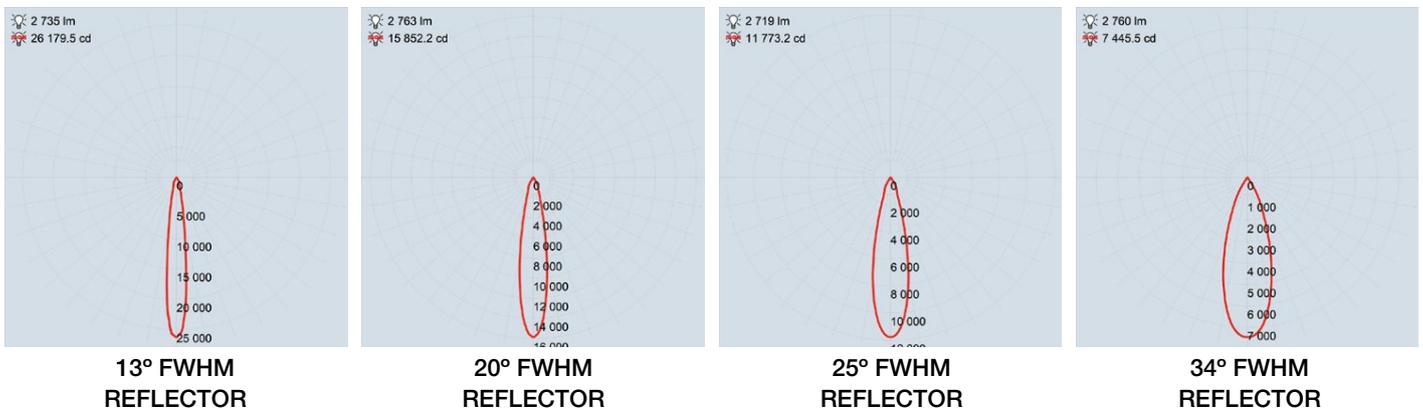

WIRING GUIDE

Available for download: hunzalighting.com/downloads

NOTE: Diagrams are a guide only, wire colours and polarity may change depending on fixture and country.

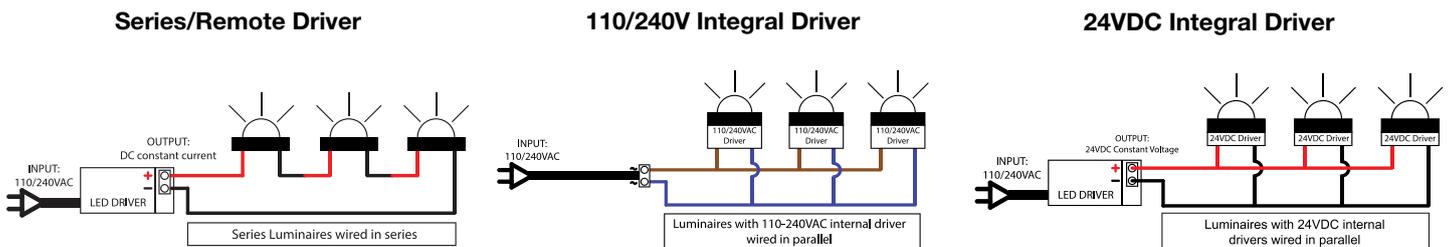

*Due to continued product enhancements, specifications may change without notification.



HUNZA LIGHTING
 130 Felton Mathew Ave
 Saint Johns
 Auckland 1072
 New Zealand

Ph: +64-9-528 9471
 Fax: +64-9-528 9471
 hunza@hunza.co.nz
 www.hunzalighting.com

INTERNATIONAL CONTACTS:
www.hunzalighting.com/contact

This document contains proprietary information of Hunza™. Its receipt or possession does not convey any rights to reproduce or disclose its content.