


## Ceiling Mount ULTRA 50

PROJECT:
TYPE:
SOURCE:
NOTES:

### SPECIFICATIONS




<b>LED Chip</b>	Cree CXA 2540 field replaceable LED board
<b>Luminaire Output</b>	5000 Lumens minimum @ 1400mA (52 watts), delivered from the Luminaire with unobstructed beam
<b>Lumens Per Watt</b>	96 Lumens minimum @ 52 watts, delivered from Luminaire with unobstructed beam
<b>CRI (3000K)</b>	80 Standard, 90+ Optional
<b>Colour Temperatures</b>	2700K, 3000K, 4000K
<b>Beam Angles</b>	13, 22, 33, 51
<b>Ingress Protection</b>	IP66
<b>Warranty</b>	Electronics = 5 years Body Aluminium = 5 years
<b>Standards</b>	BS/EN 60598.2.2 cUL 1598 CE

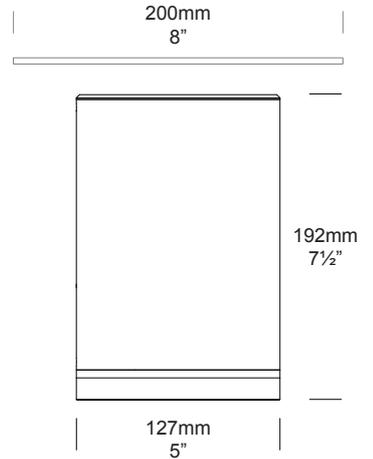

### PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

Cat. No. CM/U50

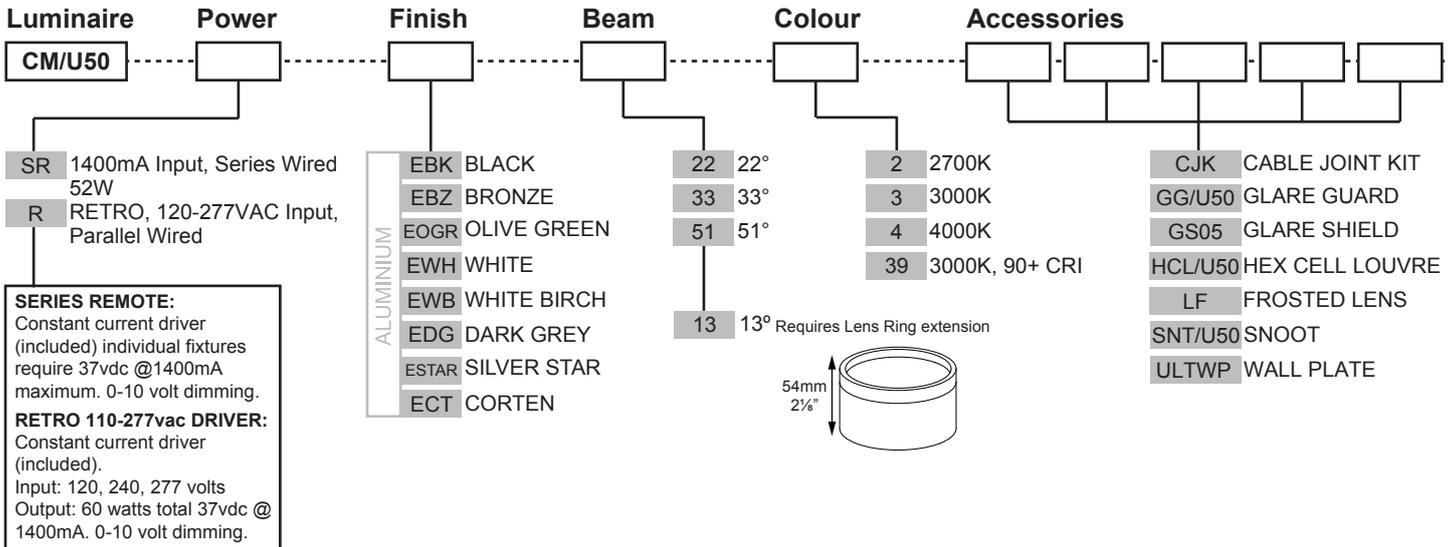

ADDITIONAL COMMENTS:

# LUMINAIRE CONSTRUCTION

**CNC machined from one of the following metals:**

**Aluminium:**

Body: 127mm (5") high corrosion resistant aluminium tube with chromate substrate and high UV resistant polyester powder coat.  
Colours: Black, Bronze, Silver Star, White, White Birch, Olive Green, Dark Grey, Corten.

**Cable:**

Water resistant rubber.

**Gaskets:**

Silicone, iron impregnated 220°C (428°F).

**Step Lens:**

12mm (1/2") extra clear, low iron, shatter resistant glass.  
Lifetime warranty.


**Mounting:**

The mounting plate is fixed to the surface using three stainless steel screws. The luminaire is then fixed to the mounting plate. A large Wall Plate is available for mounting over junction boxes.

**Luminaire Weight:**

5kg (11lb)


## ACCESSORIES




Glare Guard




Glare Shield



Hex Cell Louvre



Snoot




Wall Plate 200mm (8")

## BEAM ANGLES

High efficiency Reflectors. Field replaceable


IES files available for download: <http://www.hunzalighting.com/download.php>

Lamp=4 999 lm  
Max=42 169.6 cd  
Power=61 W

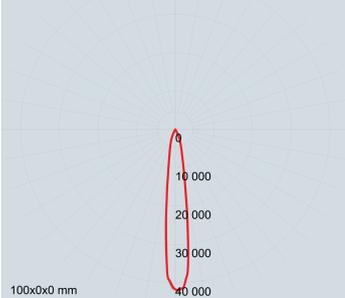


13° FWHM REFLECTOR

Lamp=5 336 lm  
Max=20 451.9 cd  
Power=61 W

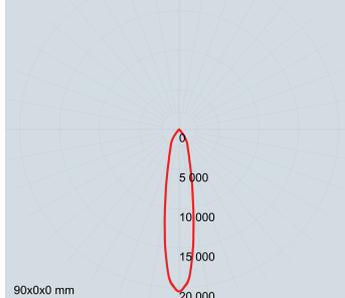


22° FWHM REFLECTOR

Lamp=5 411 lm  
Max=8 582.4 cd  
Power=61 W

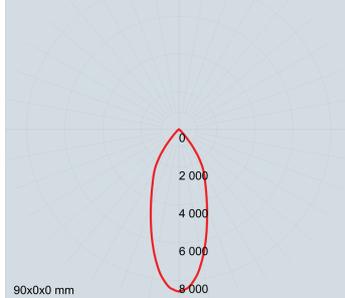

33° FWHM REFLECTOR



Lamp=5 503 lm  
Max=7 010.6 cd  
Power=61 W

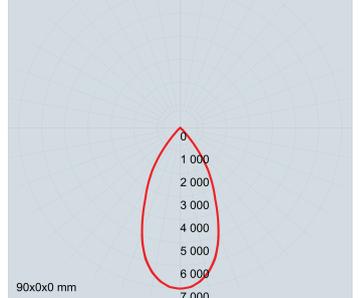

51° FWHM REFLECTOR

## WIRING GUIDE

Available for download: [www.hunzalighting.com/download.php](http://www.hunzalighting.com/download.php)

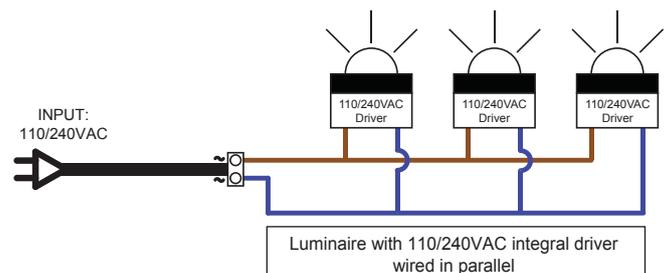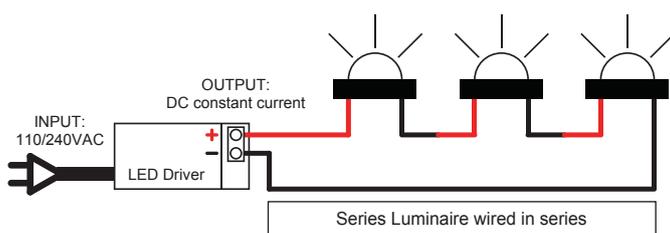

Diagrams are a guide only, wire colours and polarity may change depending on fixture and country

Specifications may change without notification

Aug 2017