


# Driveway Lite

Cat. No. DWL  
Cat. No. DWL/GU

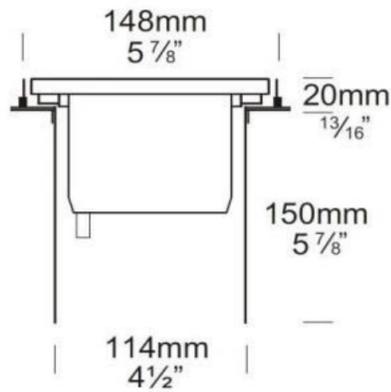

## UK & European Specification

The Driveway Lite is a luminaire designed to mount flush with the level of the driveway, pathway, hotel floors or building foyer. It has a 'Flush Fit' lens which stops water pooling and depositing dirt on the lens. There is no lip to trip over.

The Driveway Lite is supplied with a mounting canister that facilitates ease of installation. The luminaire can be driven over or walked upon without being damaged. Designed so the lamp can be angled up to 20 degrees, directed at a bush, tree, or the outside of a building, etc. without the need to remove the luminaire from the mounting canister due to the vandal-resistant three allen head screw fixing system which attaches the flange to the body of the luminaire. This luminaire has a solid bronze or 316 stainless steel flange with a powder coated black body

A GU10 version of this luminaire is also available for line voltage lamps.

Please note that the GU10 option will drastically reduce the movement of the lamp and an angle of up to 20 degrees will no longer be achievable. Effectively the lamp will be rendered fixed.

## Ordering Information

### Luminaire

DWL - Driveway Lite  
DWL/GU - GU10

### Flange Options

SBZ - Solid  
Bronze  
SS - 316 Stainless  
Steel

### Body

Black only

### Accessories

CJK - Cable joint Kit  
HCR - Hex Cell  
Retainer  
LENSLLF - Frosted  
Lens

Example: **DWL SBZ**

(Accessories ordered separately)

## Luminaire Construction

### Body:

Cast from virgin high corrosion resistant CC401 low copper aluminium alloy, with chromate substrate and high UV resistant black polyester powder coat.

### Flanges:

The flange is attached to the body by three 316 stainless steel allen head anti vandal screws and is available in either

Solid bronze - 150mm (6") bar.  
316 Stainless Steel - 150mm (6") rod.

### Mounting

Supplied with a mounting canister for casting in concrete to facilitate ease of installation. The luminaire can be driven over or walked upon without being damaged. Maximum drive over speed 10 km/h (6 mph) and weight 1500 kg (3300lbs).

## Features

### Lens:

12mm (1/2") flush fit clear tempered shatter resistant glass.

Lifetime Warranty.

### Gaskets:

Nytrol 220°C (428°F)

### Lamp Holder:

GU5.3 & GU10 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) teflon cables.

### Accessories:

Cable Joint Kit (Cat. CJK150).

Frosted Lens (Cat. STEPLLF).

Hex Cell Retainer (Cat. HCR).

GU10 Option (Cat. GU).

## Standards

IP67

UL1838

### Luminaire Weight

BRZ 1.950kg (4lb 4oz)

SS 1.900kg (4lb 3oz)

### Power Supply

HUNZA™ Inground or HUNZA™ Wall Mount Transformer: not included.

### Supplied With

MR16 GU5.3 20 or 35 watt lamp max.

GU10 - GU10 25 or 35 watt lamp max.

